



Note:
When site conditions require, wrap drainage tile in 3/4\"/>

Typical Reinforced Wall Section
Standard III Unit - Near Vertical Setback

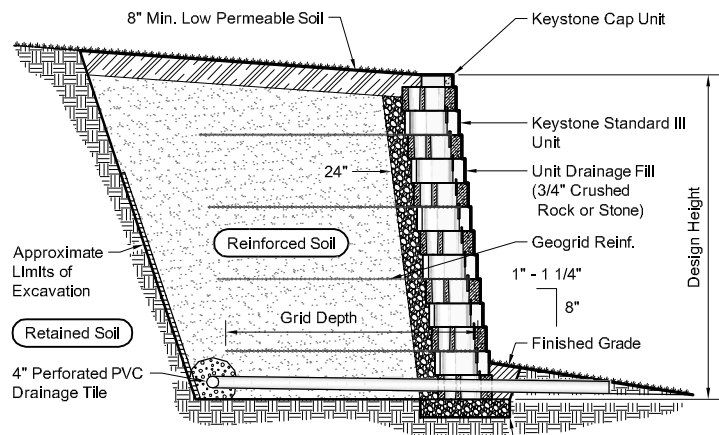

Note:
When site conditions require, wrap drainage tile in 3/4\"/>

Typical Reinforced Wall Section
Standard III Unit - 1\"/>

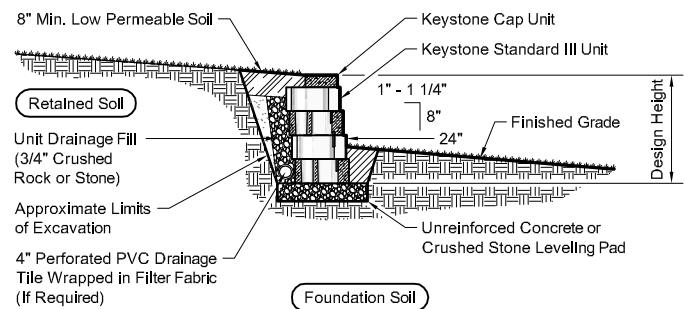


Typical Gravity Wall Section
Standard III Unit - 1\"/>


Base Leveling Pad Notes:

- The leveling pad is to be constructed of crushed stone or 2,000 psi \pm unreinforced concrete
- The base foundation is to be approved by the site geotechnical engineer prior to placement of the leveling pad.

| Standard III Unit | | Cap Unit | |
|-------------------|--------|----------|---------|
| *Width: | 18" | *Width: | 18" |
| *Depth: | 18" | *Depth: | 10 1/2" |
| *Height: | 8" | *Height: | 4" |
| *Weight: | 89 lbs | *Weight: | 50 lbs |

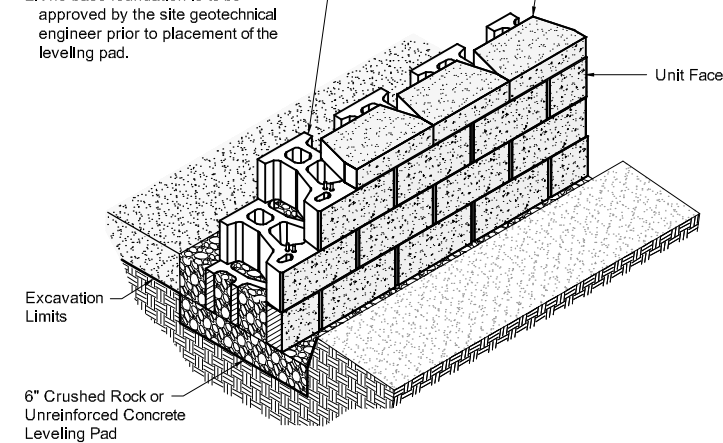


Standard III Unit/Base Pad Isometric Section View
* Dimensions & Weight May Vary by Region

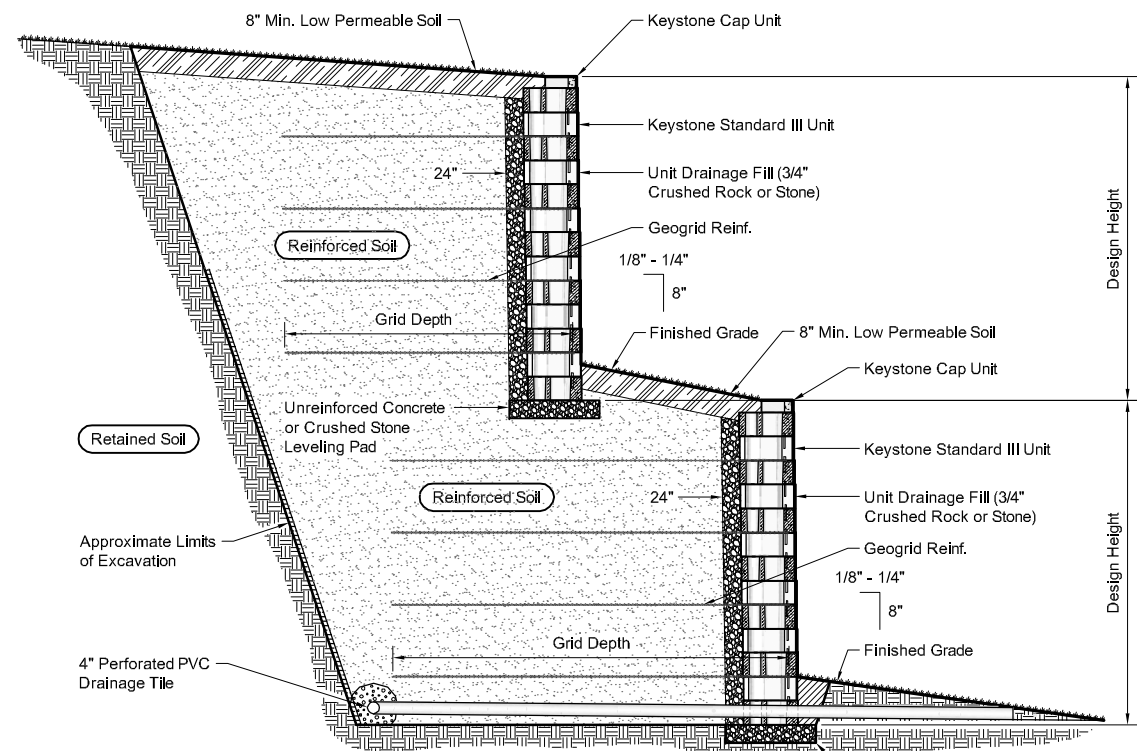


Note:
When site conditions require, wrap drainage tile in 3/4\"/>

Typical Reinforced Tiered Wall Section
Standard III Unit - Near Vertical Setback

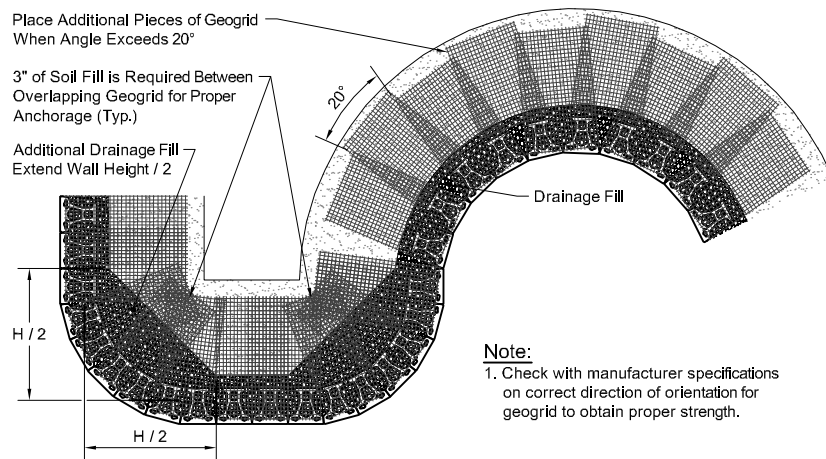


Note:
1. Check with manufacturer specifications on correct direction of orientation for geogrid to obtain proper strength.

Geogrid Installation on Curves

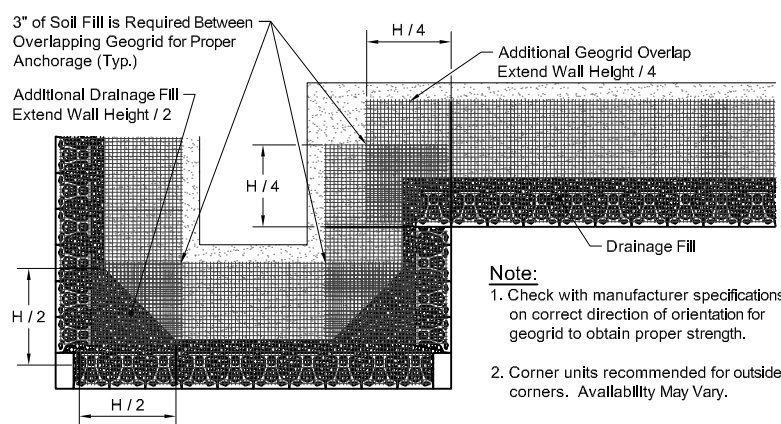


Note:
1. Check with manufacturer specifications on correct direction of orientation for geogrid to obtain proper strength.
2. Corner units recommended for outside corners. Availability May Vary.

Geogrid Installation at Corners

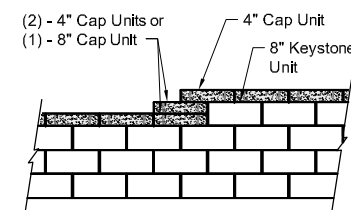


Note:
1. Secure all cap units with Keystone Kapseal or equal.

Top of Wall Steps

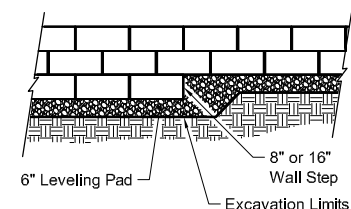


Elevation

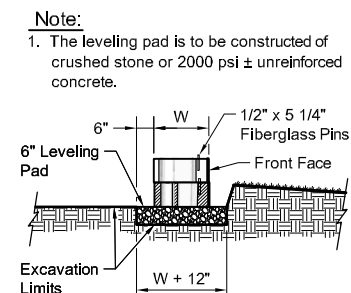


Section

Leveling Pad Detail

Note:
1. The leveling pad is to be constructed of crushed stone or 2000 psi \pm unreinforced concrete.

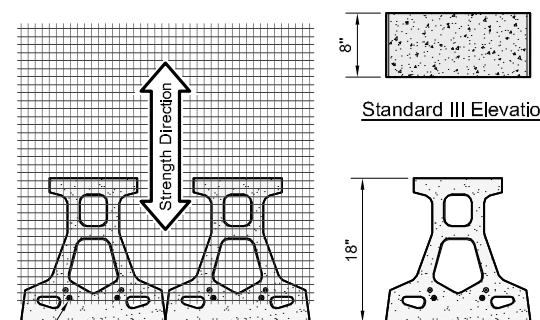

Standard III Elevation



Standard III Plan

Grid & Pin Connection

Standard III Unit
* Dimensions May Vary by Region



Cap Unit Elevation



Cap Unit Elevation



Cap Unit Plan



Universal Cap Unit Option

* Dimensions & Availability Will Vary by Region

Straight Split Cap Unit Option

* Dimensions & Availability Will Vary by Region

Copyright 2012 Keystone Retaining Wall Systems

Design is for internal stability of the KEYSTONE wall structure only. External stability, including but not limited to foundation and slope stability is the responsibility of the Owner. The design is based on the assumption that the materials within the retained mass, methods of construction, and quality of materials conform to KEYSTONE's specification for this project.

This drawing is being furnished for this specific project only. Any party accepting this document does so in confidence and agrees that it shall not be duplicated in whole or in part, nor disclosed to others without the consent of Keystone Retaining Wall Systems, Inc.

| No. | Date | Revision | By |
|-----|------|----------|----|
| | | | |
| | | | |
| | | | |
| | | | |



| | | |
|---------------------|---------------------------------------------------------------------|-------------|
| Designed By: RKM | Title: Standard III Unit 18 - Straight Face Details | Date: |
| Checked By: CDM | Project: Keystone Retaining Wall Systems Typical Wall Details | Project No: |
| Scale: No Scale | | Drawing No: |